




**TOUCH-FREE AUTOFAUCET**

**TOUCH-FREE HELPS**

**CONSERVE WATER RESOURCES**

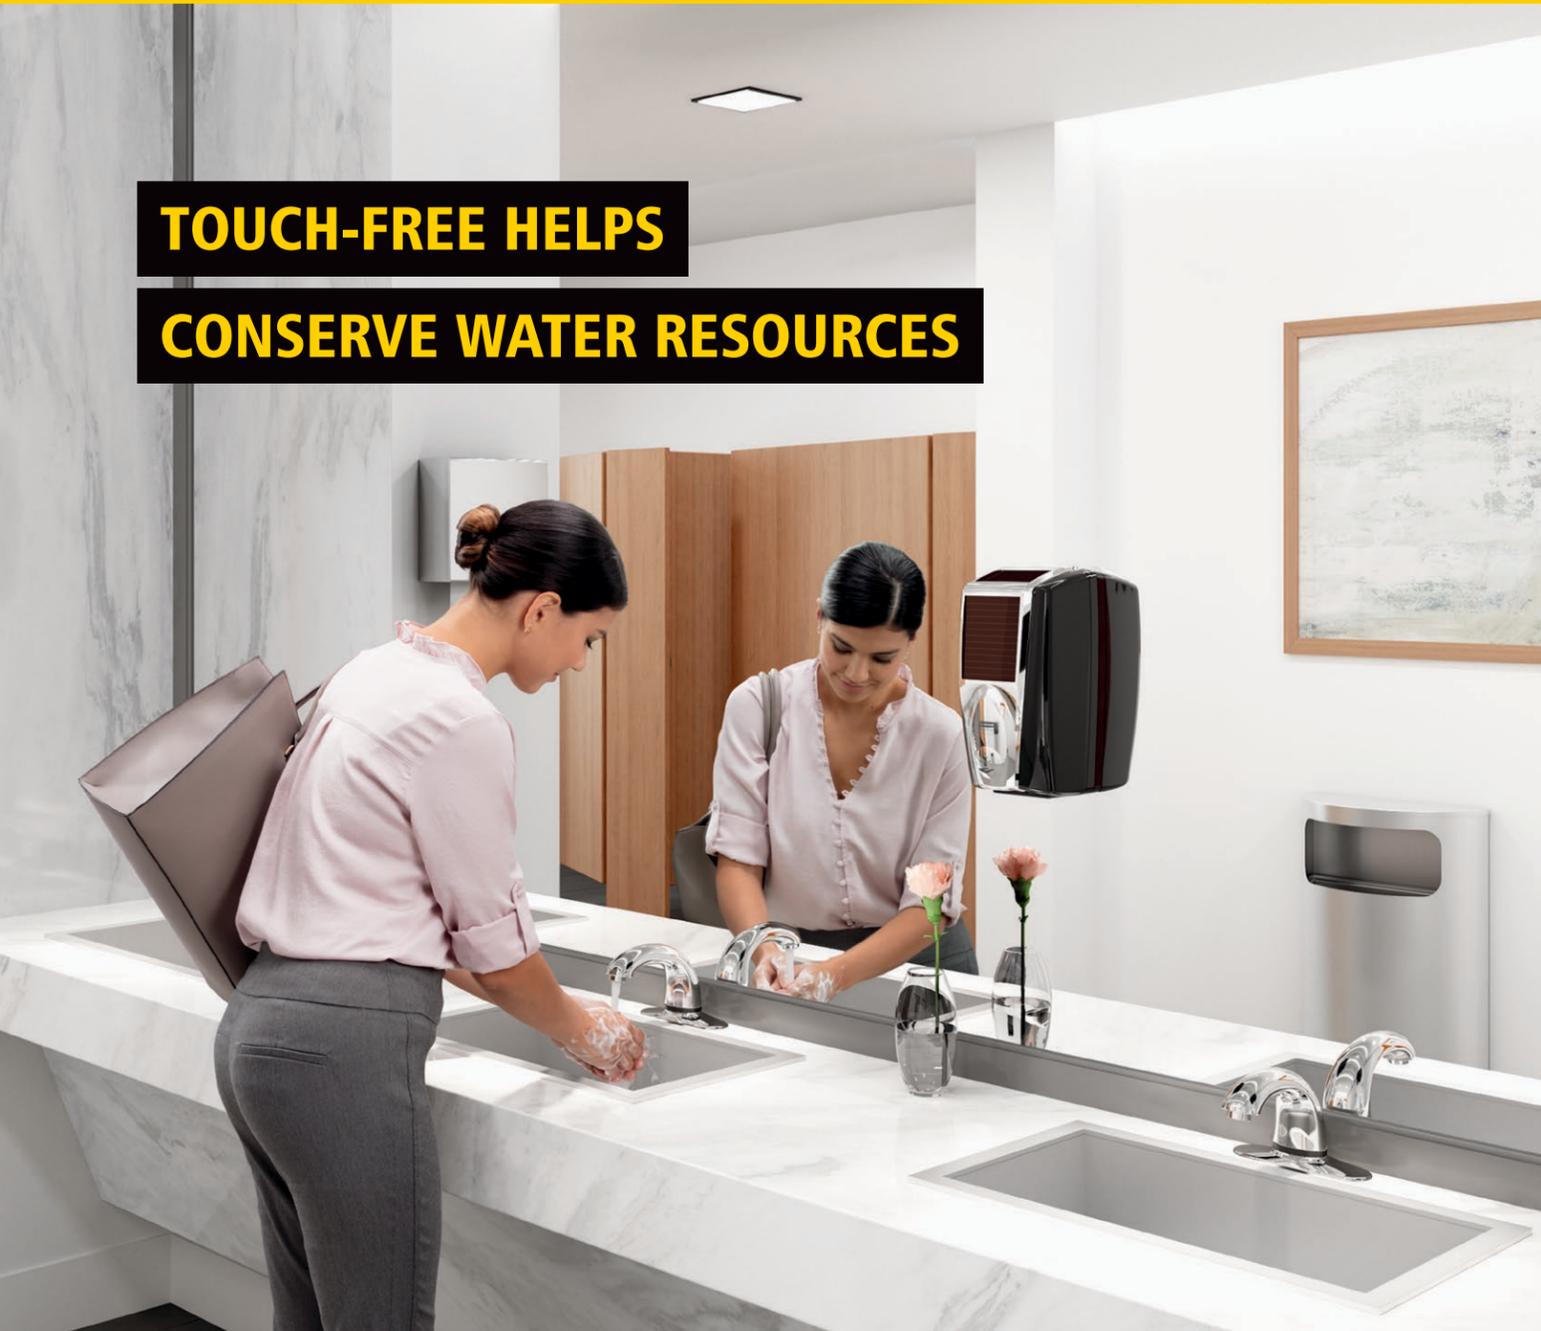

## AUTOFAUCET SOLUTIONS

- 1 SURROUND SENSOR TECHNOLOGY:**  
Creates an omnidirectional sensing zone that guarantees activation every time
- 2 WATER-FREE MECHANICS:**  
Patented dry cam gear technology controls the water flow, ensures worry-free operation, and eliminates solenoid valves to prevent costly repairs
- 3 COMPLEMENTARY DESIGN:**  
Pairs well with the OneShot® soap dispenser design
- 4 LONG BATTERY LIFE:**  
Lasts more than three years or 400,000 hand washes  
– Four D batteries included
- 5 OPTIONAL THERMOSTATIC MIXING VALVE:**  
Ensures water remains in the desired temperature range  
– Included in kit 2 or available separately




1782743




## REFERENCE CHART

KIT TYPE		KIT CONTENTS				
	MOUNTING OPTIONS	SPOUT	VALVE CONTROL MODULE	HOT/COLD SUPPLY HOSES	MIXING VALVE	THERMOSTATIC MIXING VALVE
KIT 1	SINGLE HOLE MOUNT	●	●	●	●	
	4" CENTER SET	●	●	●	●	
	8" CENTER SET	●	●	●	●	
KIT 2	SINGLE HOLE MOUNT	●	●	●		●
	4" CENTER SET	●	●	●		●
	8" CENTER SET	●	●	●		●


Available in the following center-to-center mounting hole options:



**SINGLE HOLE MOUNT  
(NO COVER PLATE)**  
Requires a single hole for installation



**4" CENTER SET  
COVER PLATE**  
One-piece faucet with hot and cold valves that are set on four inch center-to-center



**8" CENTER SET  
COVER PLATE**  
One-piece faucet with hot and cold valves that are set on eight inch center-to-center

**LARGE** COMMERCIAL BUILDINGS CONSUME **50 GALLONS** OF WATER PER WORKER EACH DAY<sup>1</sup>


**85%** OF BSC'S SAY **IMPROVING FACILITY IMAGE IS THE TOP CHALLENGE** IMPACTING CUSTOMERS<sup>2</sup>

**80%** OF GERMS ARE TRANSMITTED **BY HANDS**<sup>3</sup>

# THE ANATOMY OF A FAUCET

In order to choose the right faucet for your facility, it's helpful to first understand what the key parts of a faucet are:

- 1 SPOUT:**  
Output device through which water flows
- 2 COVER PLATE:**  
Plate used to cover unused mounting holes on sinks
- 3 VALVE CONTROL MODULE (AUTO/OPEN VALVE DIAL):**  
Helps to ensure sanitary flushing of hot water system to eliminate stagnant water and bacteria growth
- 4 MANUAL MIXING VALVE:**  
Controls temperature of water from faucets  
**THERMOSTATIC MIXING VALVE (OPTIONAL):**  
Anti-scalding feature, which controls water temperature within +/- 3°F
- 5 SUPPLY HOSE:**  
Used to connect the shutoff valve to the bottom of a single hole faucet

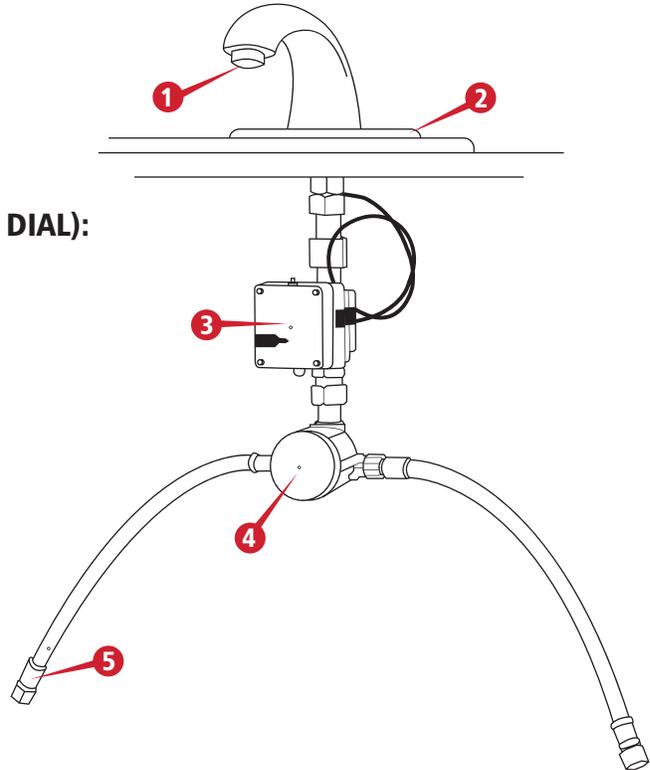

## Faucets

NO.	DESCRIPTION	COLOR	KIT	CASE PACK
<b>SINGLE HOLE MOUNTS</b>				
1782742	AutoFaucet – Milano	Polished Chrome	1	1
1818966	AutoFaucet – Milano	Polished Chrome	2	1
<b>4" CENTER SETS</b>				
1782743	AutoFaucet – Milano	Polished Chrome	1	1
1818967	AutoFaucet – Milano	Polished Chrome	2	1
<b>8" CENTER SETS</b>				
1782744	AutoFaucet – Milano	Polished Chrome	1	1
1818968	AutoFaucet – Milano	Polished Chrome	2	1

All faucets are low lead compliant and come with a 0.5 GPM spout.

Top-selling item

## Accessories

NO.	DESCRIPTION	CASE PACK
490144	AutoFaucet Valve Control Module & Battery Box	1
490251	AutoFaucet Valve Control Module & Washer	1
FG402188	AutoFaucet Thermostatic Mixing Valve	1
490179	AutoFaucet Manual Mixing Valve	1
490071	6-Pack AC Adapter Kit for OneShot or AutoFaucet*	1
490099	Single Unit 6V DC AC Adapter for OneShot or AutoFaucet	1
490100	Wire Assembly for OneShot of AutoFaucet	1

\*Includes Wall Transformer, 6-Pack Distribution Box, Ground Wire Kit, and Mounting Hardware Flow Control Aerators that deliver 1.0 GPM, 2.0 GPM, or 2.2 GPM can be purchased separately

Kit 1 Includes: spout, valve control module, mixing valve, and hot/cold supply hoses (3/8" comp. x 3/8" comp. x 12" length)

Kit 2 Includes: spout, valve control module, thermostatic mixing valve, and hot/cold supply hoses (3/8" comp. x 3/8" comp. x 12" length)

